


QUAD ANALOG AUDIO DISTRIBUTOR VM81 (QUAD 1 IN TO 3 OUTS)

Distributor VM81 with XLR connectors multiplies 4 balanced inputs to 3 balanced outputs each. Mode switch on the front panel allows to change audio distributor configuration:

- 4 inputs to 3 outputs each;
- 2 inputs to 6 outputs each;
- 1 input to 12 outputs each.

Mode switcher has a safety cap to prevent accidental unwanted mode change. Each channel provides level adjustment from – 6dB to +11dB. All level regulators are located on the front panel.

The only alone 19" 1U audio distributor with XLR connectors to distribute 4 inputs to 3 outputs each in the market.

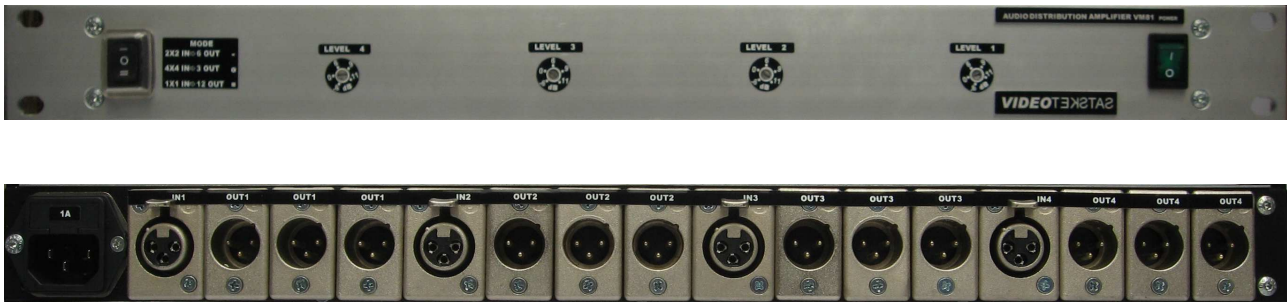

Technical specifications:

Inputs:	4 balanced
Outputs:	3 balanced each. Total – 12 outputs
Coupling:	DC (AC outputs coupling is optional)
Max level:	24 Vpp.
Level adjustment:	-6dB...+11dB
THD:	0,004%
SNR:	93dB
Connectors:	XLR
Power supply:	~220V, 10VA
Dimensions:	483x44x130mm (19", 1U)
Weight:	1,3kg

Vilnius g. 215/15, Šiauliai LT-76348, Lithuania

www.textus.lt

E-mail: info@textus.lt

Tel: +37041-525930

Fax: +37041-525930